

Powerful and efficient with 3-phase AC drive motor

Extremely manoeuvrable due to compact design

High driving and cornering stability due to integrated support wheels

Maintenance-free gel battery and integrated charger

Built-in weighing system (optional)



EJE M13/M15

Electric Pedestrian Pallet Truck (1,300/1,500 kg)


The EJE M13 and EJE M15 trucks were specially developed for the internal transfer of lighter goods. The 0.6-kW drive motor supports the transport of pallets and goods weighing up to 1500 kg over short distances. Therefore the EJE M13 and EJE M15 are ideal for use in small and medium-sized companies with an occasional need for goods transport.

Thanks to the maintenance-free, powerful 3-phase AC motor, energy consumption is reduced and the best conditions are provided for rapid and cost-efficient goods throughput.

This gives the EJE M13 and EJE M15 their advantages, particularly in confined spaces: Their compact design, the low front end length (l2) of just 435 mm and the low overall height guarantee maximum manoeuvrability and offer every operator an optimum view of the fork tips.

In addition, two sprung and cushioned support wheels ensure safe and stable travel. A gel battery used in conjunction with a built-in charger allows for flexible operation, without having to fill up the battery with water.

EJE M13/M15

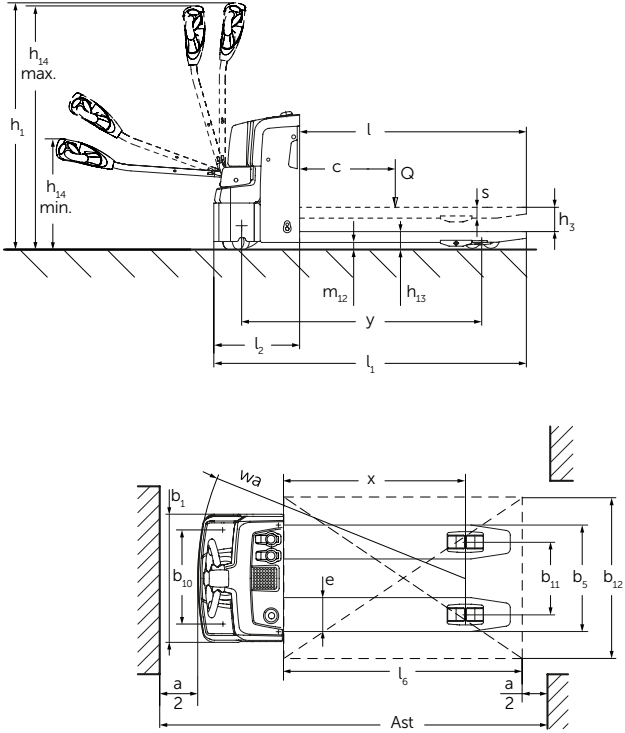

Technical data in line with VDI 2198

| | | | | Jungheinrich | | | | | | | |
|------------------|-------|---|--|----------------|--------------------------------|---------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Identification | 1.1 | Manufacturer (abbreviation) | | | | | | | | | |
| | 1.2 | Model | | EJE M13 | EJE M13 ⁵⁾ | EJE M15 | EJE M15 ⁵⁾ | EJE M15 | | | |
| 1.3 | Drive | | Electric | | | | | | | | |
| | 1.4 | | Manual, pedestrian, stand-on, seated, order picker operation | | | | | pedestrian | | | |
| 1.5 | 1.5 | | Load capacity/rated load | Q | t | 1.3 | 1.3 | 1.5 | 1.5 | 1.5 | |
| | 1.6 | | Load centre distance | c | mm | 600 | | | | | |
| 1.8 | 1.8 | | Load distance | x | mm | 914 | 894 | 914 | 894 | 764 | |
| | 1.9 | | Wheelbase | y | mm | 1,212 | 1,212 | 1,212 | 1,212 | 1,062 | |
| Weights | 2.1.1 | | Net weight incl. battery (see row 6.5) | | | kg | 214 | 253 | 219 | 258 | 219 |
| | 2.2 | | Axle load with load front/rear | | | kg | 696 / 1,018 | 716 / 1,037 | 700 / 1,019 | 720 / 1,038 | 700 / 1,019 |
| | 2.3 | | Axle load without load front/rear | | | kg | 162 / 52 | 184 / 69 | 166 / 53 | 188 / 70 | 166 / 53 |
| Wheels / frame | 3.1 | | Tyres | | TPU/PU | | | | | | |
| | 3.2 | | Tyre size, front | | mm | | | | | Ø230x65 | |
| | 3.3 | | Tyre size, rear | | mm | | | | | Ø80x70 | |
| | 3.4 | | Additional wheels (dimensions) | | mm | | | | | 2 x Ø80x40 | |
| | 3.5 | | Wheels, number front/rear (x = driven wheels) | | | | | | | 1x+2/4 | |
| | 3.6 | | Tread width, front | | b ₁₀ | mm | 460 | | | | |
| | 3.7 | | Tread width, rear | | b ₁₁ | mm | 368 | | | | |
| Basic dimensions | 4.4 | | Lift | | h ₃ | mm | 120 | | | | |
| | 4.9 | | Height of tiller in drive position min. / max. | | h ₁₄ | mm | 740 / 1,190 | | | | |
| | 4.15 | | Height, lowered | | h ₁₃ | mm | 85 | 90 | 85 | 90 | 85 |
| | 4.19 | | Overall length | | l ₁ | mm | 1,585 | 1,605 | 1,585 | 1,605 | 1,435 |
| | 4.20 | | Length to face of forks | | l ₂ | mm | 435 | 455 | 435 | 455 | 435 |
| | 4.21 | | Overall width | | b ₁ /b ₂ | mm | 650 ²⁾ | 650 | 650 ²⁾ | 650 | 650 ²⁾ |
| | 4.22 | | Fork dimensions | | s/e/l | mm | 55 / 172 / 1,150 | 60 / 182 / 1,150 | 55 / 172 / 1,150 | 60 / 182 / 1,150 | 55 / 172 / 1,000 |
| | 4.25 | | Width across forks | | b ₅ | mm | 540 ¹⁾ | 550 | 540 ¹⁾ | 550 | 540 ¹⁾ |
| | 4.32 | | Ground clearance, centre of wheelbase | | m ₂ | mm | 35 | | | | |
| | 4.33 | | Aisle width for pallets 1000 x 1200 sideways | | Ast | mm | 1,643 | 1,663 | 1,643 | 1,663 | 1,493 |
| 4.34 | | Aisle width for pallets 800 x 1200 lengthways | | Ast | mm | 1,843 | 1,863 | 1,843 | 1,863 | 1,693 | |
| 4.35 | | Turning radius | | W _a | mm | 1,357 | 1,357 | 1,357 | 1,357 | 1,207 | |
| Performance data | 5.1 | | Travel speed, laden/unladen | | km/h | | 4.5 / 5 | | | | |
| | 5.2 | | Lift speed, laden/unladen | | m/s | | 0.05 / 0.06 | | | | |
| | 5.3 | | Lowering speed, laden/unladen | | m/s | | 0.08 / 0.04 | | | | |
| | 5.8 | | Max. gradeability, laden/unladen | | % | | 4 / 10 | | | | |
| | 5.10 | | Service brake | | | | electric | | | | |
| Electrics | 6.1 | | Drive motor, output S2 60 min. | | kW | | 0.6 | | | | |
| | 6.2 | | Lift motor kW output at S3 5 % | | kW | | 1.2 | | | | |
| | 6.3 | | Battery as per DIN 43531 /35/36 A, B, C, no | | | | no | | | | |
| | 6.4 | | Battery voltage/ nominal capacity | | V/Ah | | 24 / 65 ³⁾ | 24 / 65 ³⁾ | 24 / 90 ⁴⁾ | 24 / 90 ⁴⁾ | 24 / 90 ⁴⁾ |
| | 6.5 | | Battery weight | | kg | | 35 | 35 | 53 | 53 | 53 |
| | 6.6 | | Energy consumption according to VDI cycle | | kWh/h | | 0.24 | 0.24 | 0.27 | 0.27 | 0.27 |
| Misc. | 8.1 | | Type of drive control | | | | AC SpeedControl | | | | |
| | 8.4 | | Sound pressure level at operator's ear as per EN 12053 | | dB (A) | | 66 | | | | |

¹⁾ 670 mm also possible

²⁾ If b₅ = 670 mm, b₁/b₂ = 670 mm

³⁾ Specification battery voltage/nominal capacity at K20; at K5: 24V, 53.3Ah

⁴⁾ Specification battery voltage/nominal capacity at K20; at K5: 24V, 70Ah

⁵⁾ with integrated weighing function

Benefit from the advantages



Centralized control instruments



Optimal stability due to spring load support wheels



Ergonomic designed tiller head



Weighing device (optional)

Innovative drive and control technology

Motors with 3-phase AC technology offer many advantages and more efficiency while simultaneously reducing the operating costs thanks to the perfect match with our own controllers:

- High efficiency levels with excellent energy management.
- Rapid directional change without delay.
- No carbon brushes mean the drive motor is maintenance-free.

Energy efficiency

Economic energy management increases the efficiency and lifetime of the battery and components:

- Smart shut down: the EJE M13 shuts down automatically after 30 minutes without use.
- Energy recovery due to regenerative braking.

Compact design

Thanks to their compact design, the EJE M13 and the EJE M15 are perfect for use in confined spaces.

- High manoeuvrability due to short chassis dimension and low overall height.
- Important instruments such as battery discharge indicator, hourmeter, emergency disconnect and key are centrally located on the truck.
- Sufficient storage space even with slender design.

Ergonomic operations

The trucks are perfectly adapted to the ergonomic needs of the operator:

- Reduced force required while steering due to low-mounted tiller.
- Dual-sided operation of tiller handle for ergonomic and safe use.

Optimum stability

The EJE M13 and EJE M15 have two sprung support rollers installed along-

side the drive wheel. These increase the stability of the truck, thereby reducing the risk of transport damage. Entry rollers have also been fitted to the fork tips on the standard model to ensure the easy picking up of pallets.

Safe operation

Various safety measures reduce the risk of injury for operators and guarantee a high level of safety:

- Reduced risk of foot injuries due to low ground clearance of only 35 mm.
- Additional protection due to the complete closed housing, in particular the lift cylinder.

Options

As an option, the EJE M13 and the EJE M15 can be ordered with a weighing system. This enables goods to be weighed and moved using just one truck. Four weighing cells provide optimal results with a deviation of less than 1% across the entire weighing range.

Jungheinrich Aktiengesellschaft

Friedrich-Ebert-Damm 129
D-22047 Hamburg
Telephone +49 40 6948-0
Telefax +49 40 6948-1777

info@jungheinrich.com
www.jungheinrich.com

The German production facilities in Norderstedt, Moosburg and Landsberg are certified. **ISO 9001**
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.



JUNGHEINRICH
Machines. Ideas. Solutions.